


PRODRAIN 6MM DUCTILE IRON SAFEHEEL GRATING [200/200]

Product Data Sheet

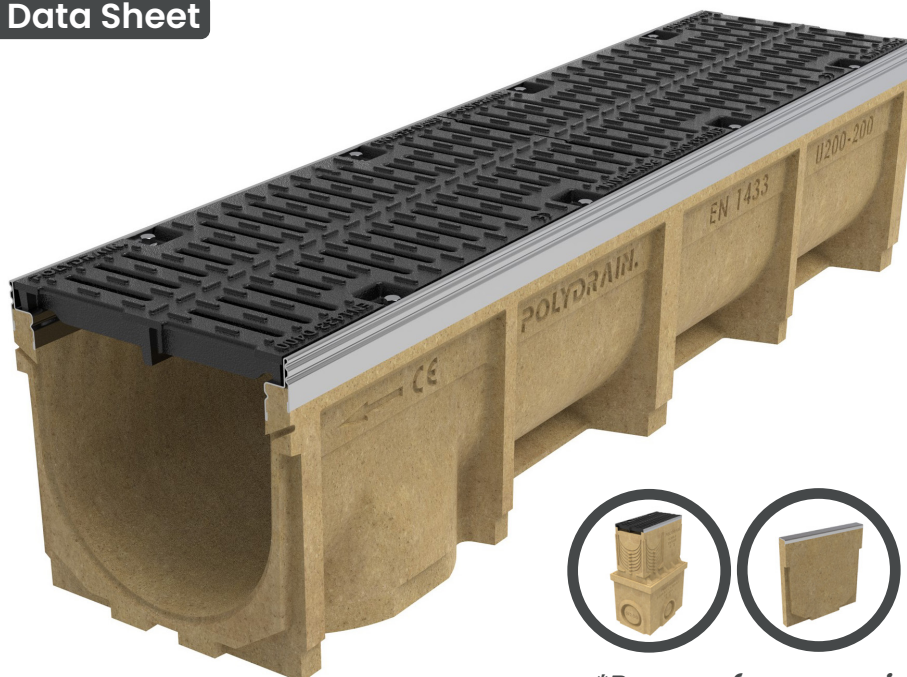

**Range of accessories to suit*

PRODUCT CODE	MATERIAL	L X W X H [mm]	WEIGHT [kg]
PD20206D400	Polymer Concrete Ductile Iron Grate	1000 x 240 x 240 <i>[External]</i> 1000 x 200 x 200 <i>[Internal]</i>	44.6

Key Benefits

- Resistant to chemicals & frost **[-50°C]**
- 6mm Safeheel ductile iron grating
- Heat resistant **[100°C continuous load, upto 200°C with load duration of upto 5 minutes]**
- Constant slope channel
- Galvanised steel edge
- Load tested to a rating of D400
- CE marked with certificates of conformity to BS EN 1433



Tested to BS EN 1433 D400 & conforms to building regulations

Product Accessories

- ProDrain 6mm Ductile Iron Safeheel Grating Sump Unit 200 [W]
- Polymer Concrete End Cap [200/200]
- Polymer Concrete End Cap Outlet, [200/200]

Application

- HGV parking
- Car parks
- Petrol station forecourts
- Public landscaping



Installation guidance and assistance is available
For further information, please call 0121 552 8887

info@polydraincivils.com | www.polydraincivils.com

