


# ULTRADRAIN 10MM DUCTILE IRON GRATING [100/150]

## Product Data Sheet

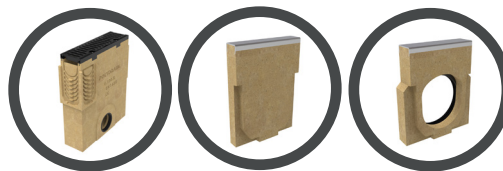

*\*Range of accessories to suit*

| PRODUCT CODE        | MATERIAL                               | L X W X H [mm]                                                           | WEIGHT [kg] |
|---------------------|----------------------------------------|--------------------------------------------------------------------------|-------------|
| <b>UD101510F900</b> | Polymer Concrete<br>Ductile Iron Grate | 1000 x 140 x 190 <i>[External]</i><br>1000 x 100 x 150 <i>[Internal]</i> | 25          |

### Key Benefits

- Resistant to chemicals & frost [**-50°C**]
- 10mm ductile iron grating
- Heat resistant [**100°C continuous load, upto 200°C with load duration of upto 5 minutes**]
- Constant slope channel
- Ductile iron edge
- Load tested to a rating of F900
- CE marked with certificates of conformity to BS EN 1433



**Tested to BS EN 1433 F900 & conforms to building regulations**

### Product Accessories

- UltraDrain 10mm Ductile Iron Grating Sump Unit 100 [W]
- Polymer Concrete End Cap [100/150]
- Polymer Concrete End Cap Outlet, [100/150]

### Application

- Airports
- Industrial yards
- Ports



Installation guidance and assistance is available  
For further information, please call 0121 552 8887

[info@polydraincivils.com](mailto:info@polydraincivils.com) | [www.polydraincivils.com](http://www.polydraincivils.com)

